



NOVIKSTONE™ FS - FIEDLSTONE SUMMARY INSTALLATION GUIDE

CAUTION: ALWAYS INSTALL PRODUCT FROM LEFT TO RIGHT AND REMEMBER THAT POLYMER UNDERGOES EXPANSION/CONTRACTION DUE TO TEMPERATURE VARIATIONS. FOR A BETTER LOOK WE RECOMMEND TO INSTALL PANELS ON FLAT SURFACES (EX: PLYWOOD PANELS OR OSB PANELS). IF PANELS ARE INSTALLED ON A WALL WITH FURRINGS, FURRING STRIPS MUST BE INSTALLED OBLIQUELY AND SPACED BY 8" (20,32CM).


FRANÇAIS
AU VERSO

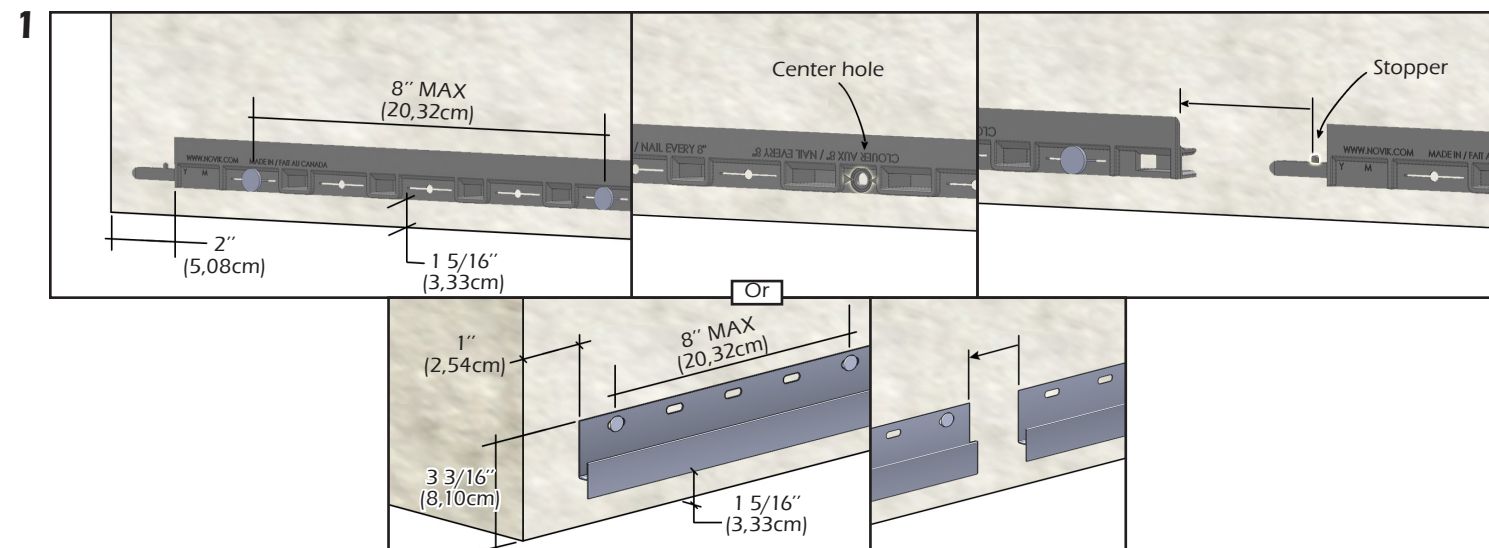



2 Important - Required on first rows' panels only

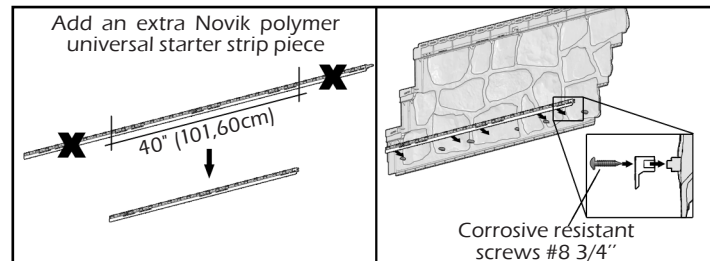

3 When used with Onepiece Trim 2"


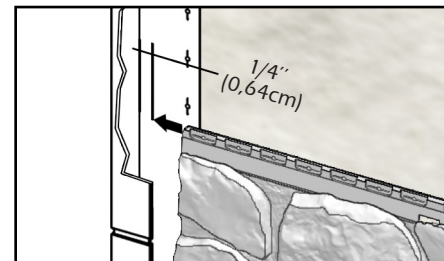


4 For full length panel

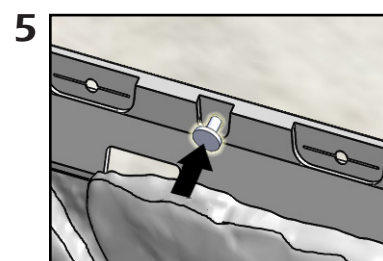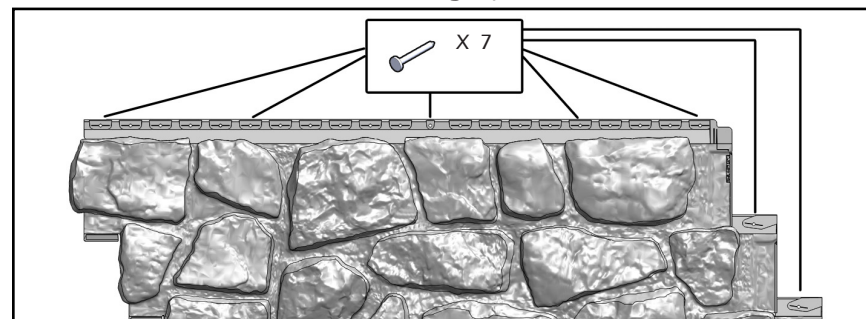


Block each panel at its center


For each nail

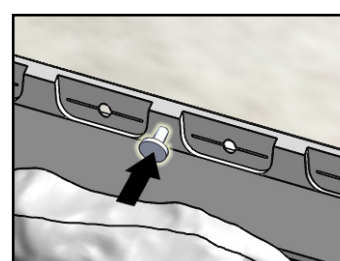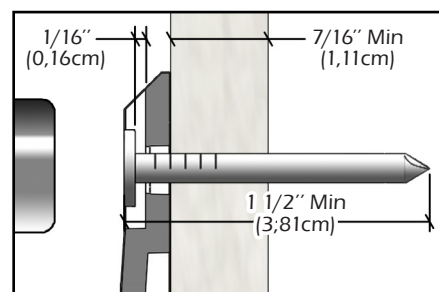




6 Installation when outdoor temperature is above 68°F(20°C). Press against big line.

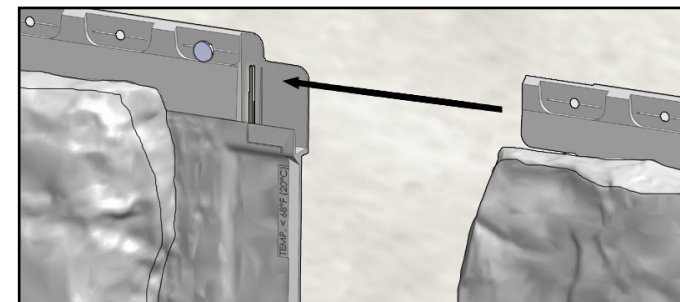

Installation when outdoor temperature is below 68°F(20°C). Stop at the small line.

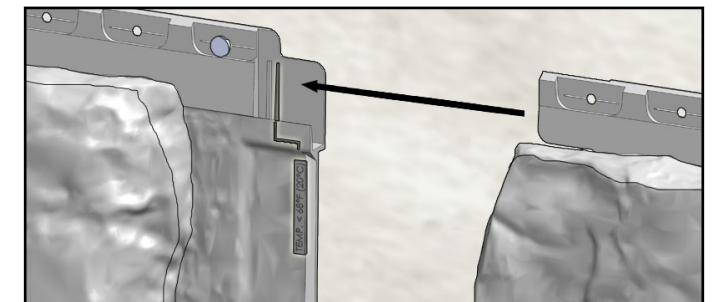


7 Alternate the joints between rows

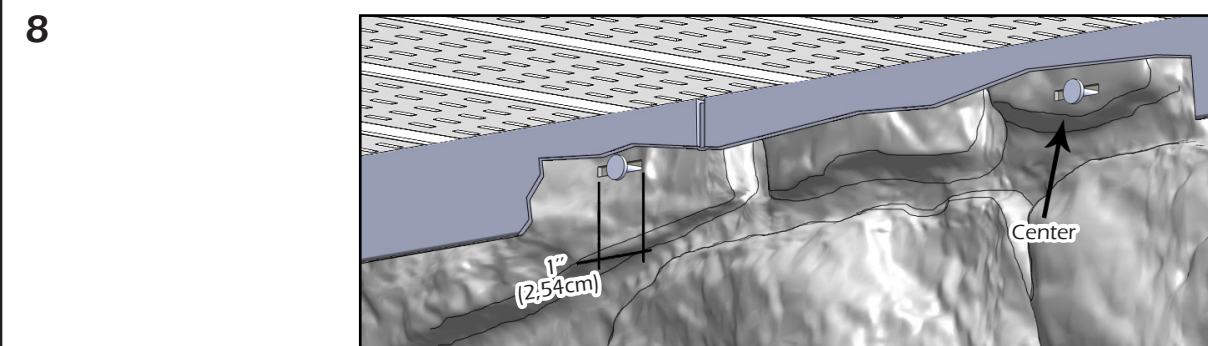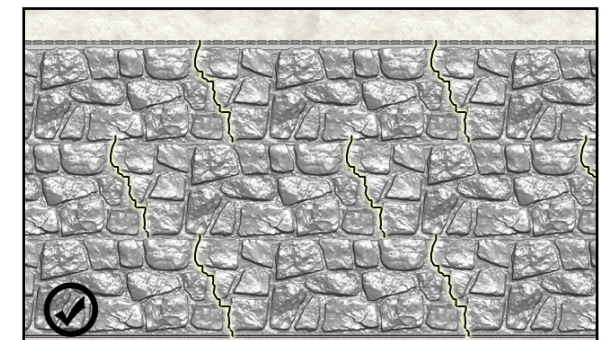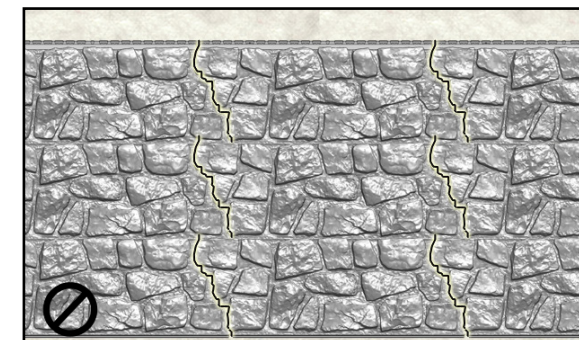

If you need to attach the siding in an area other than the installation hole, create a 1" (2,54 cm) long slot to allow nailing. Always nail in the middle of the slot.

9 INSTALLATION WITH NOVIK CORNER 3"

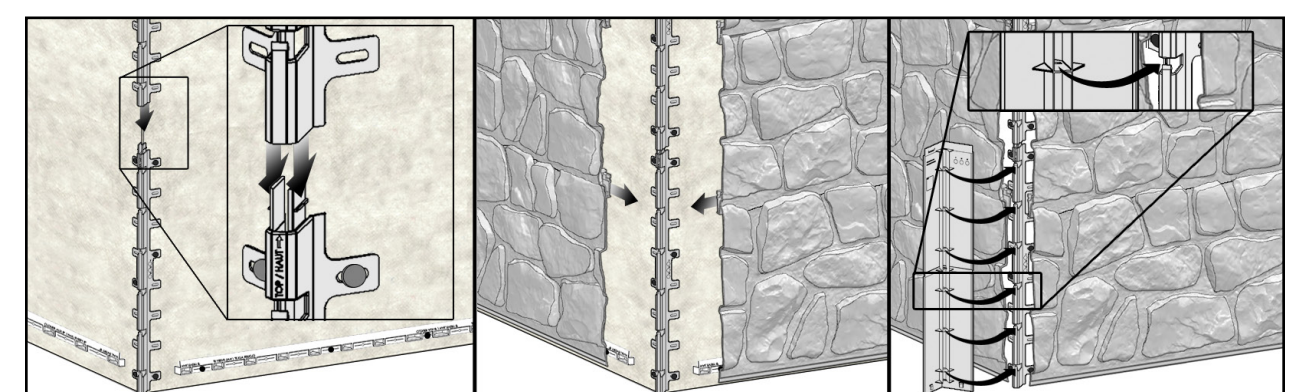

NOVIK

2025/07/25

See www.novik.com for the complete installation guide.

DIV0275C-ENG

Ajouter une section de bande de départ universelle en polymère Novik

40" (101,60cm)

Vis #8 3/4"
résistantes à la corrosion

1/4" (0,64cm)

A close-up photograph of a metal fastener, likely a bolt or screw, securing a metal rail. A black arrow points to the fastener. The rail is part of a larger structure, possibly a bed frame or a piece of furniture.

Technical drawing of a door handle assembly. The drawing shows a side view of the handle with the following dimensions:

- 1/16" (0,16cm) for the distance from the door edge to the start of the handle shaft.
- 7/16" Min (1,11cm) for the distance from the start of the handle shaft to the center of the handle.
- 1 1/2" Min (3,81cm) for the total length of the handle.




A close-up photograph showing a metal track with several rectangular slots. A black arrow points to a small metal pin being inserted into one of the slots. The track is mounted on a light-colored surface.

A detailed texture of a stone wall, featuring irregular grey stones with darker grey mortar. A yellow lightning bolt symbol is visible in the bottom left corner, indicating a warning or hazard.

A stone wall with a yellow lightning bolt symbol in the bottom left corner.

8

9 INSTALLATION AVEC DES COINS 3" NOVIK

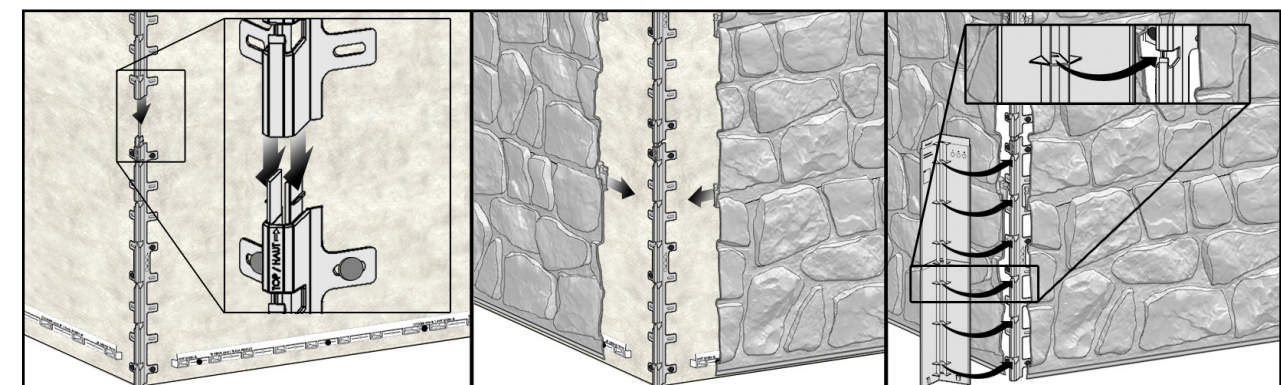

DIV0275C-FRE